

CHM8X Platform

Modular Crash Hardened Memory





CHM8X Platform

Feature/Specification				
Basic Standards		EN62625 and EN50155, IEEE1482.1:1999 & 2013, FRA 49 CRF Part 229, §229.135 Appendix D Table 1 Option A		
Other Utilized Standards (where deemed applicable)		NFPA130, IEEE16, IEEE1478, AARS9401, AARS9101, EN 45545-2:2023 with Hazard Level 3, EN 61373 category 1, class B:2010, EN 50121-3-2:2017		
Power Supply		via USB/PoE		
Temperature range		-40°C to +85°C (operation) -40°C to +85°C (storage)		
Storage Medium		internal flash		
FTA Buy America Compliance		Yes		

Variant	Standard	Capacity	Interface	Usage
CHM82	EN62625-1/IEEE1482.1:1999	16 GB - 1 TB	USB 2.0	Data
CHM84	IEEE1482.1:2013/FRA CFR49	16 GB - 128 GB	USB 2.0	Data
CHM86	IEEE1482.1:2013/FRA CFR49	256 GB - 1 TB	Ethernet	Video






»CHM8X Platform –
Modular Crash Hardened Memory!«

Deuta America Modular Crash Hardened Memory
Deuta America Corporation is an international leading supplier in rail crash hardened memory (CHM) with almost ten different CHM products in service around the world.




Our new CHM8X product line is the cutting edge of innovation for crash protected memory solutions across markets and applications, allowing for the simple addition of crash memory to any system. The CHM8X is small, light, and can be either 19” rack mounted or bracket mounted.

Scalable, cost-efficient protected memory for data and video across multiple standards in a compact footprint.

Bracket Mounting

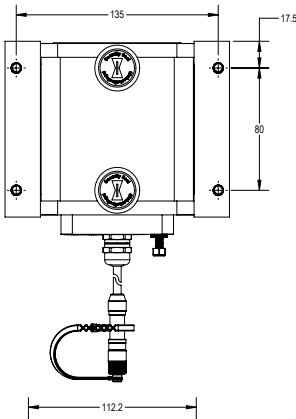

Rack Mounting

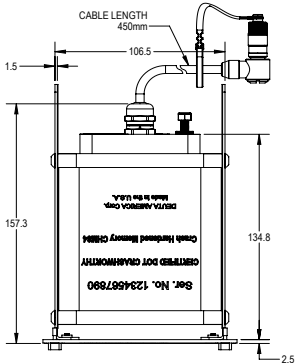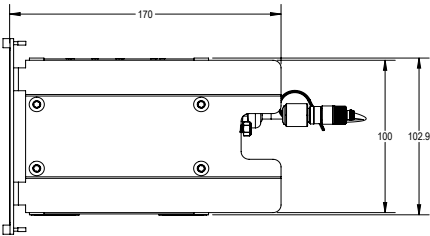

All units in mm



»CHM82 – According to IEEE1482.1:1999 – Modular Crash Hardened Memory!«

Add high capacity Crash Hardened Memory to a IEEE1482.1:1999 system
This flexible CHM unit provides up to 1TB memory capacity in a small package supporting both 19" rack mounting or bracket mounting options. Default connection is a 90cm USB cable with a M8 4 pole connector.

The memory can be expanded from 16GB up to 1TB. Through the small size, the unit can be mounted separately, integrated in a 19" rack or even mounted inside an event recorder or a network video recorder.

CHM82 – According to IEEE1482.1:1999

Feature/Specification	
Crash Standard	EN62625-1/IEEE1482.1:1999
Basic Standards	EN50155, IEEE1482.1:1999
Other Utilized Standards (where deemed applicable)	NFPA130, IEEE16, IEEE1478, AARS9401, AARS9101, EN 45545-2:2023 with Hazard Level 3, EN 61373 category 1, class B:2010, EN 50121-3-2:2017
Power Supply	via USB
Temperature range	-40°C to +85°C (-40°F to +185°F) (operation) -40°C to +85°C (-40°F to +185°F) (storage)
Storage Medium	internal flash
Capacity	16 GB - 1 TB
Interface	M8 USB 2.0, 4 pole
Usage	Data
FTA Buy America Compliance	Yes

Housing Dimensions	
Width	102.7 mm (4.0")
Height	102.7 mm (4.0")
Depth	170 mm (6.7")
Weight	3.4 kg (7.5 lbs)



Mounting Options	
19" rack mounting:	
Width	121.6 mm or 152.1 mm (4.8" or 6.0")
Height	128.4 mm (5.1")
Depth	170 mm (6.7")
Weight	with mounting 3.9 kg (8.9 lbs)

large brackets:	
Width	192 mm (7.6")
Height	106,4 mm (4.2")
Depth	200 mm (7.9")
Weight	with mounting 4.7 kg (10.4 lbs)

small brackets:	
Width	150 mm (5.9")
Height	106,4 mm (4.2")
Depth	170 mm (6.7")
Weight	with mounting brackets: 4.2 kg (9.2 lbs)



»CHM84 – According IEEE2013/FRA 49CFR data – Modular Crash Hardened Memory!«

A small size and low weight Crash Hardened Memory still meets all the existing crash protection standards for the railway industry and provides memory capacity up to 128GB.

The design is flexible and modular and can be delivered with multiple bracket mounted designs and 19" rack mounted designs. The unit can be used as a standalone protected memory or integrated into a recorder. The unit provides a USB connected interface with multiple connectors and cable length.

CHM84 - According IEEE2013/FRA 49CFR data

Feature/Specification	
Crash Standard	IEEE1482.1:2013, EN 62625 and FRA 49 Part 229
Basic Standards	EN50155
Other Utilized Standards (where deemed applicable)	OK
Power Supply	via USB
Temperature range	-40°C to +85°C (-40°F to +185°F) (operation) -40°C to +85°C (-40°F to +185°F) (storage)
Storage Medium	internal flash
Capacity	16 GB - 128 GB
Interface	M8 USB 2.0, 4 pole
Usage	Data
FTA Buy America Compliance	Yes

Housing Dimensions (including bracket)	
Width	102,7 mm (4,0")
Height	102,7 mm (4,0")
Depth	170 mm (6,7")
Weight	3,3 kg (7,3 lbs)

Mounting Options

19" rack mounting:	
Width	121,6 mm or 152,1 mm (4,8" or 6,0")
Height	128,4 mm (5,1")
Depth	170 mm (6,7")
Weight	with mounting 3,8 kg (8.4 lbs)

large brackets:	
Width	192 mm (7,6")
Height	106,4 mm (4,2")
Depth	200 mm (7,9")
Weight	with mounting 4,6 kg (10 lbs)

small brackets:	
Width	150 mm (5,9")
Height	106,4 mm (4,2")
Depth	170 mm (6,7")
Weight	with mounting brackets: 4,1 kg (9 lbs)





»CHM86 – According IEEE2013/FRA 49 CFR video – Modular Crash Hardened Memory!«

Easily Add IEEE/FRA Crash Hardened Memory to Existing Systems!

Applied to IEEE1482.1: 2013 and FRA 49 CFR 229 standards, the CHM86 Crash Hardened Memory Unit allows for effortless integration to new or existing systems. The CHM86 is offered up to 1 TB capacity. The unit utilizes an on-board ethernet network interface, adding Crash Hardened Memory is simple and straightforward requiring minimal modifications to existing systems.

CHM86 Highlights:

- Up to 1 TB memory capacity
- Gigabit Ethernet communication
- Web-based service PC interface
- Power over Ethernet power supply
- FRA 49 CFR Part 229, § 229.135 Appendix D
- IEEE Std. 1482.1-2013, Part 4.6
- Optimized for video data protection
- On-board processing capabilities
- S.M.A.R.T.-like memory diagnostic interface (API)

CHM86 – According IEEE2013/FRA 49 CFR video

Feature/Specification	CHM86aj
Crash Standard	CFR 49 229 App. D, IEEE1482.1:2013
Other Standards	EN50155, EN45545, etc
Power	PoE
Power (super capacitor)	> 5 seconds
Temperature range	-40°C to +85°C (operation) -55°C to +85°C (storage)
Capacity	1 TB
Nominal TBW	3,072 TB
Interface	10/100/1000 Mbps Ethernet
Network Storage	SAMBA, NFS
Mounting	Brackets (optionally 19" rack)
MTBF	500,000 hours

Dimensions (approx.)	(standard brackets)
Width	102 mm (4")
Height	102 mm (4")
Depth	170 mm (6.7")
With brackets	(standard brackets)
Width	190 mm (7.5")
Height	107 mm (4.2")
Depth	170 mm (6.7")
Optional brackets	(small brackets)
Width	150 mm (5.9")
Height	107 mm (4.2")
Depth	170 mm (6.7")
Weight (w/o brackets)	4,1 kg (9 lbs)

The easy-to-add CHM to existing systems:

- Video and voice recording
- Train data recording with DEUTA REDBOX®
- Monitoring and diagnostic system or other peripheral system

DEUTA AMERICA

DEUTA AMERICA Corp.

85 S Dixie Hwy A-B · Saint Augustine · FL 32084

www.deuta-america.com

Phone: + 1 904-429-7910

Please send your enquiries and orders to:

info@deuta-america.com



DEUTA America Corp. | 85 S Dixie Hwy A-B | Saint Augustine | FL 32084 | USA | Phone +1 (904) 429 7910 | E-Mail: info@deuta-america.com | www.deuta-america.com
Represented by the Managing Directors: Mr. Blake Kozol and Mr. Anders Molne | Pictures and articles including any other contents printed in the brochure are proprietary.
The reprint, copy, distribution as well as any other actions violating the copyright are subject to prior written authorization by DEUTA America Corp.

The information contained in this brochure are of general information purposes only representing examples of our standard products. The information contained in the brochure does not constitute any guarantee for technical data or features. DEUTA AMERICA Corp. checked the information carefully, however, it assumes no liability for the timeliness, correctness and completeness or quality of the provided information. Required special features are subject to separate individual agreement on the purchase of a product. Only variations of the pictured standard products agreed on the purchase are decisive.

The state of products pictured and described in this brochure corresponds with that on the final editing, however, DEUTA America Corp. reserves the right to make changes in the meantime.

The names DEUTA REDBOX®, IconTrust®, SelectTrust®, SignalTrust®, MouseTrust®, D-SmartView®, D-EcoView®, D-PowerView® and DEUTA RedCloud® are registered trademarks of DEUTA-WERKE GmbH. SelectTrust® is patented inventions owned by DEUTA-WERKE GmbH. IconTrust® is protected by the following US patent No. 9,164,860 B2. Without prior written consent of DEUTA-WERKE GmbH the use of trademarks and patents is not allowed.