

DEUTA AMERICA

DEUTA AMERICA Corp.
85 S Dixie Hwy A-B · Saint Augustine · FL 32084
www.deuta-america.com
Phone: + 1 904-429-7910

Please send your enquiries and orders to:
info@deuta-america.com



DEUTA XP20 - Travel Simulation with real Travel Data

Drive unit for Wheel Pulse Generators

Simulation of the rotating vehicle axle



DEUTA America Corp. | 85 S Dixie Hwy A-B | Saint Augustine | FL 32084 | USA | Phone +1 (904) 429 7910 | E-Mail: info@deuta-america.com | www.deuta-america.com
Represented by the Managing Directors: Mr. Blake Kozol and Mr. Anders Molne | Pictures and articles including any other contents printed in the brochure are proprietary.
The reprint, copy, distribution as well as any other actions violating the copyright are subject to prior written authorization by DEUTA America Corp.

The information contained in this brochure are of general information purposes only representing examples of our standard products. The information contained in the brochure does not constitute any guarantee for technical data or features. DEUTA AMERICA Corp. checked the information carefully, however, it assumes no liability for the timeliness, correctness and completeness or quality of the provided information. Required special features are subject to separate individual agreement on the purchase of a product. Only variations of the pictured standard products agreed on the purchase are decisive.

The state of products pictured and described in this brochure corresponds with that on the final editing, however, DEUTA America Corp. reserves the right to make changes in the meantime. The names DEUTA REDBOX®, IconTrust®, SelectTrust®, SignalTrust®, MouseTrust®, D-SmartView®, D-EcoView®, D-PowerView® and DEUTA RedCloud® are registered trademarks of DEUTA-WERKE GmbH. SelectTrust® is patented inventions owned by DEUTA-WERKE GmbH. IconTrust® is protected by the following US patent No. 9,164,860 B2. Without prior written consent of DEUTA-WERKE GmbH the use of trademarks and patents is not allowed.

Holistic Sensor Simulation



DEUTA XP20 test benches offer advanced possibilities in sensor testing for rail operators, system integrators and workshops.

Travel Simulation with real Driving Data

With the XP20 test benches speed and route information systems which have been installed on the vehicle can be tested. The traction operations are adjusted through direct simulation of the sensor input parameters. The XP20 test benches allow „system testing of traction operations“ without the vehicle actually moving on the track. The sensors remain in the vehicle wiring and are „driven“ via the XP20 test benches with real speed profiles. Calibration test runs are therefore unnecessary.

DEUTA takes an holistic view of 'sensor simulation'. The XP20 product family consists of test benches which stimulate axle generators, pick-up sensors or Doppler radar sensors.

XP20 DR (Drive Remote) - Simulation of the rotating vehicle axle
Pulse generators capture the speed via the rotating vehicle axle (axle mounted generator) or via a rotating gear wheel on the gear box of the vehicle drive (pick-up sensor).



Possible Configurations:


XP20DR (Drive Remote)
The stand-alone test bench which drives the pulse generator is operated using the mobile touch terminal. The set contains 5 m data cable connecting the mobile operation terminals with the basic unit as well as software including a driving profile modus.



XP20DS (Drive Service) + XP20R (Remote)
The service test bench which drives the pulse generator is operated using a mobile operation terminal XP20R or a PC with software emulation of the XP20 user interface. Alternatively, the activation is combined (see synchronous operation).



Synchronous operation
Up to nine XP20 test benches are networked and operated using the mobile operation terminal XP20R or a PC with software emulation of the XP20 user interface.

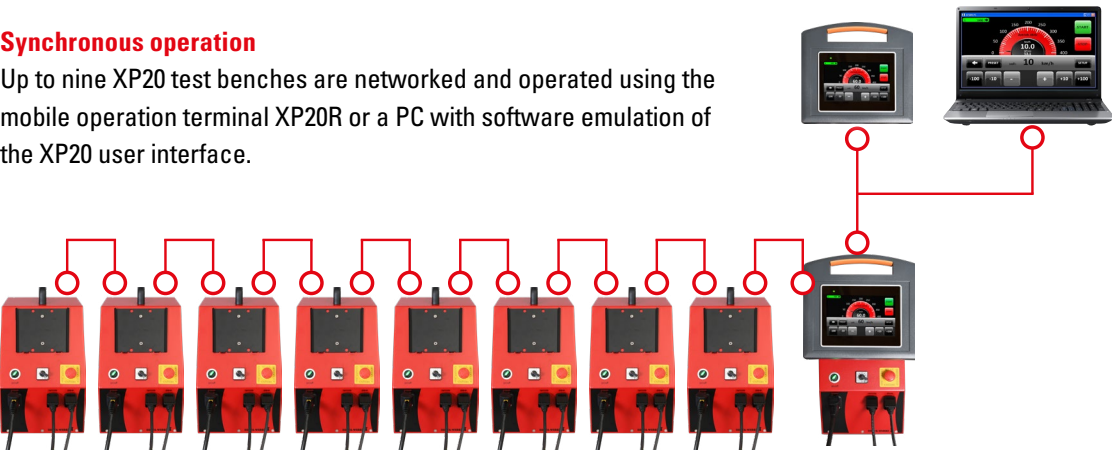

The advantages of the XP20 test benches at a glance:

- Real Travel Simulations**
- System testing without costly and time-consuming calibration runs
 - no reservation of test routes
 - maximum reproducibility
 - identical boundary conditions
 - no environmental influences

- Operating terminal**
- comfortable & ergonomic
 - memory function and operational profile mode
 - optional software for operation terminal simulation
 - a variety of possibilities for application with mobile operation terminal
 - synchronous control of up to nine XP20 drive units

- Time and Money Savings**
- shorter development and project processing times during system integration
 - reduced need for personnel during system tests following maintenance and commissioning

Sample Applications

System calibration in the depot and on track

The XP20 drive units emulate real and fictitious test runs within a signal chain, regardless of prevailing weather conditions and external influences. Commissioning tests and annual safety inspections are carried out directly on the vehicle using the XP20. The costly investment in time and staff for separate test drives can be dispensed with. The XP20s are protected for tough on-site use with robust, portable housing. The service devices can be operated via data link from the vehicle using the mobile operation terminal XP20.

System testing in the Laboratory

The XP20 drive units save time and money. Up to nine XP20 drive units can be coupled to a test and simulation environment and centrally operated via Ethernet interface. In this way, the XP20 drivers cover the growing demand for system and integration testing resulting from:

- shorter development times for newer vehicles and train safety systems
- multiple uses of vehicles in cross-border traffic
- project-specific applications.

Analysis of critical results in the laboratory

The areas of applications of the XP20 drive units range from analysis of critical results within safety relevant assessments, to post-processing and analysis of incidents right up to accident assessment.

Component testing in the Workshop

The XP20 drive units are an important part of quality assurance. Testing of functions during and following maintenance and servicing measures ensure the correct function of the signal chain: sensor— recorder— indicator.

Operators of large fleets of vehicles stockpile large numbers of spare components. In order to guarantee the correct functioning of these, even after many years in storage, the operators carry out a test of components with the XP20 drive unit prior to installation in the vehicle or during an inventory.



Simple Operation


Operation of the software controlled XP20 drive unit is via a 7" touch display. The operation terminal can be optionally integrated into the XP20 or placed in a separate housing. The software emulation of the operation terminal is also separately available for the user PCs.

Signal Evaluation

The speed signal of the XP20 drive units is used for system components such as indicators, DEUTA REDBOX® Multifunctional Recorders and train safety systems. For detailed investigations of the pulse generator signals, the XP20 is combined with evaluation software using an oscilloscope or a measuring board.

A variety of accessory kits

With the appropriate accessory parts, the XP20 drive units can be combined with all sensors: from heavyweight alternating current generators and electronic incremental generators to pick-up sensors.

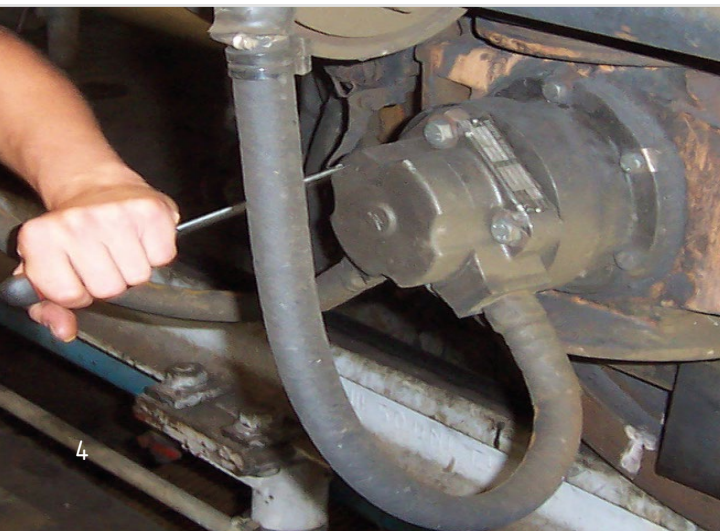

XP20 drive units for System Manufacturers:


System Integration, Implementation, Analysis

- Integration tests in the laboratory
- Integration tests in the vehicle
- Investigation into critical incidents within safety relevant assessments in the laboratory
- Analysis of breakdowns and accident assessment in the laboratory

XP20 drive units for Railway operators:

Maintenance Service Repair

- annual system safety inspections on the vehicle (e. g. PZB - intermittent automatic train control)
- cyclical testing and calibration of components (e. g. indicators) in the workshop
- operation and implementation tests following maintenance and servicing measures on the vehicle
- system testing of replacement component parts on the vehicle
- function testing of replacement components prior to installation in the vehicle
- testing of components which have been in storage (incoming and outgoing goods)
- error diagnosis of components in the workshop

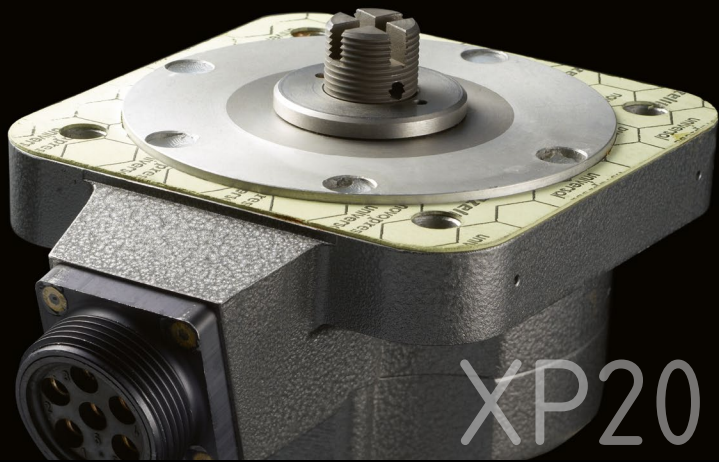

XP20 DR, DS, R

The XP20D drive units for axle mounted generators and pick-up sensors are an integral part of the simulation environment for system testing of speed sensors within train protection. The compact housing facilitates testing directly on the vehicle.

The XP20DR set is a stand-alone solution with a mobile operating terminal, 5 m data cable as well as software with driving profile modus. The XP20DS variant serves as a remotely controlled service device for testing on the vehicle. It is supplied without its own operation terminal. Activation of the service device XP20DS is effected via the mobile operation terminal XP20R, the software emulation of the XP20 operator interface or indirectly in synchronous operation. With the operation terminal up to nine XP20 test benches are simultaneously activated. Variable settings, e. g. wheel diameter, are set separately for each driver.

The required revolutions or speed are entered into the operation terminal. The current revolutions or speed of the XP20 driver are displayed on the operation terminal. The rotational direction can be changed at any time.

On the rear side of the XP20 there is a power unit on which all current generators and pick-up sensors can be installed. A range of accessory kits is available for this.

20 freely programmable memory spaces are available for both speed and revolutions. Real or fictitious train runs can be simulated in the "Operational Profile" mode.



Rear side XP20DR and XP20DS:
On the XP20DR and XP20DS the sensors to be tested are installed on the rear side of the drive shaft .



XP20DR
Set with integrated operating terminal



XP20DS
Service unit & operating terminal XP20R

Characteristics/Specifications


XP20DR	Stand-alone Set
	with mobile operating terminal, 5 m data cable as well as software with vehicle driving profile
Function	Simulation of real drives and speed profiles for axle mounted generators and pick-up sensors
Field of application	For laboratory environments, maintenance workshops and servicing on the vehicle
Operation	7" Touch Operation Terminal
Range of adjustment	0 ... 4.000 U/min or 0 ... 400 km/h
Wheel diameter	Adjustable from 450 - 2,000 mm
Direction	Adjustable left and right
Operating voltage	110 - 240 V 50-60 Hz
Power consumption	max. 500 W
Weight	approx. 13 kg
Dimensions (HxWxD)	500 x 215 x 280 mm
XP20DS	Test bench
	Specifications as for XP20DR, software, data cable
Weight	10.5 kg
Dimensions (HxWxD)	330 x 215 x 280 mm
XP20R	Mobile Operating Terminal with 7" Touch Display
Weight	2.5 kg
Dimensions (HxWxD)	254 x 276 x 64 mm



XP20R



XP20DR

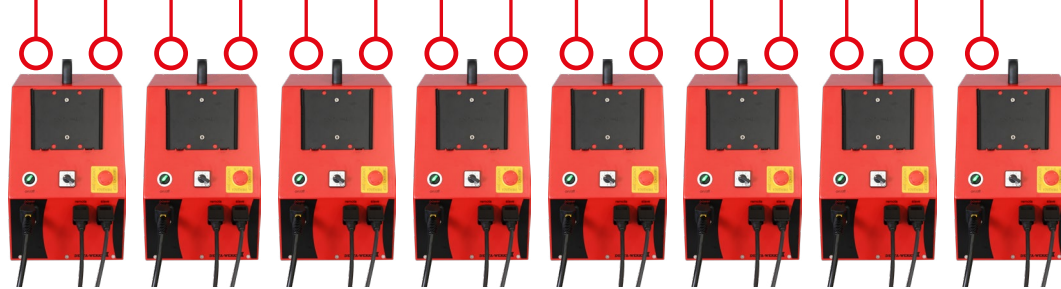

XP20DS